

# Agilent U1241A/U1242A Handheld Digital Multimeter

## Data Sheet



## Key Features

### Check more, fix more

- 10,000 count display
- 0.09% basic DCV accuracy
- True RMS AC measurement
- Basic functions — ACV, DCV, ACI, DCI, resistance, frequency, diode, continuity test
- Advanced functions — Capacitance, temperature, MINMAX recording

### Ease of use

- Adjustable backlighting — 2 intensity levels
- Manual data logging (U1242A only)
- Built-in switch counter, harmonic ratio (U1242A only), dual/differential temperatures capabilities (U1242A only)


### Built to last

- Overmold body casing
- CAT III 1000 V safety protection
- Certified to CE, UL, CSA standard
- Operating temperature:  $-10\text{ }^{\circ}\text{C}$  to  $55\text{ }^{\circ}\text{C}$

## Introduction

The Agilent U1240A Series handheld digital multimeters enable you to check more with wide measurement ranges. They feature true RMS readings on its 10,000 counts display. The adjustable backlighting allows you to complete your jobs even in subdued lighting conditions, at the same time prolonging the battery life. Your maintenance tasks are greatly simplified with its built-in switch counter, harmonic ratio, dual temperature and differential temperature capabilities, with just a press of the button. The meters have high safety rating with CAT III 1000 V protection and certified to CE, CSA and UL standards. Better yet, the U1240A Series comes with certificate of calibration and test report – at no extra cost.

## Functions and ranges at a glance

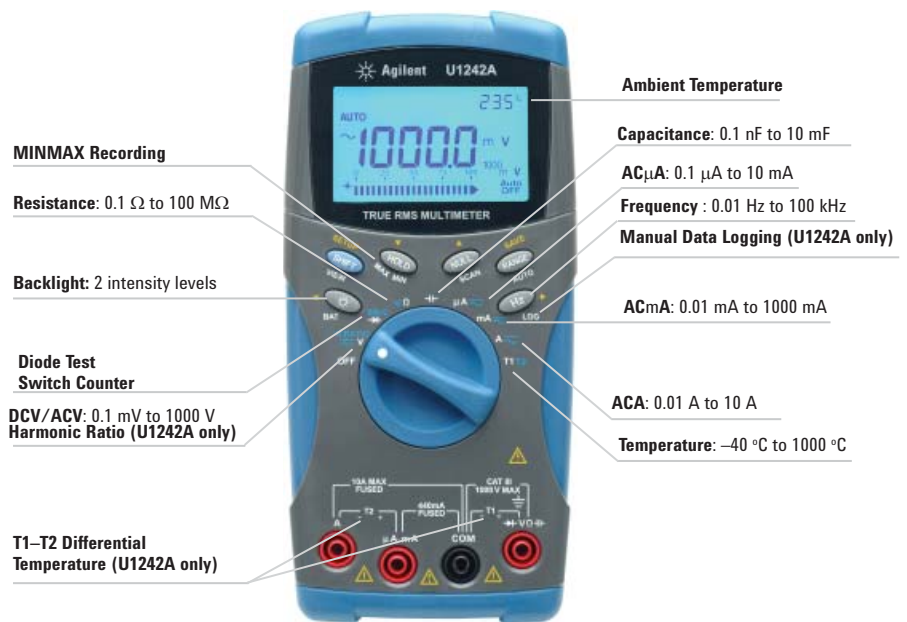

## DC SPECIFICATIONS

FUNCTION	RANGE	RESOLUTION	TEST CURRENT/ BURDEN VOLTAGE	ACCURACY ± (% of reading + No. of Least Significant Digit)	
				U1241A	U1242A
VOLTAGE <sup>[1]</sup>	1000.0 mV	0.1 mV	–	0.09% + 5	
	10.000 V	0.001 V	–	0.09% + 2	
	100.00 V	0.01 V	–		
	1000.0 V	0.1 V	–	0.15% + 5	
CURRENT	1000.0 µA	0.1 µA	< 0.06 V (50 Ω)	0.1% + 3	
	10000 µA	1 µA	< 0.55 V (50 Ω)	0.1% + 3	
	100.00 mA	0.01 mA	< 0.18 V (0.5 Ω)	0.2% + 3	
	440.0 mA <sup>[2]</sup>	0.1 mA	< 0.8 V (0.5 Ω)	0.5% + 3	
	10.000 A <sup>[3]</sup>	0.001 A	< 0.4 V (0.01 Ω)	0.6% + 5	
RESISTANCE <sup>[4]</sup>	1000.0 Ω <sup>[5]</sup>	0.1 Ω	0.5 mA	0.3% + 3	
	10.000 kΩ <sup>[5]</sup>	0.001 kΩ	50 µA		
	100.00 kΩ	0.01 kΩ	4.91 µA		
	1000.0 kΩ	0.1 kΩ	447 nA		
	10.000 MΩ	0.001 MΩ	112 nA	0.8% + 3	
	100.00 MΩ <sup>[6]</sup>	0.01 MΩ	112 nA	1.5% + 3	
DIODE TEST <sup>[7]</sup>	1 V	0.001 V	approximately 0.5 mA	0.3% + 2	

## AC SPECIFICATIONS

FUNCTION	RANGE	RESOLUTION	TEST CURRENT/ BURDEN VOLTAGE	ACCURACY ± (% of reading + No. of Least Significant Digit)		
				40 Hz to 500 Hz	500 Hz to 1 kHz	1 kHz to 2 kHz
AC VOLTAGE <sup>[8]</sup> TRUE RMS	1000.0 mV	0.1 mV	–	1% + 5	2% + 5	–
	10.000 V	0.001 V	–		1% + 5	2% + 5
	100.00 V	0.01 V	–			
	1000.0 V	0.1 V	–		–	
AC Current <sup>[9]</sup> TRUE RMS	1000.0 µA	0.1 µA	< 0.06 V (50 Ω)	1% + 5	1.5% + 5	–
	10000 µA	1 µA	< 0.55 V (50 Ω)			
	100.00 mA	0.01 mA	< 0.18 V (0.5 Ω)			
	440.0 mA <sup>[10]</sup>	0.1 mA	< 0.8 V (0.5 Ω)			
	10.000 A <sup>[11]</sup>	0.001 A	< 0.4 V (0.01 Ω)			

[1] Input impedance: 10 MΩ (nominal).

[2] Current can be measured up to 440 mA continuously. An additional 0.2% needs to be added to the specified accuracy if the signal measured is in the range of 440 mA to 1100 mA for 30 seconds maximum. After measuring current of > 440 mA, leave the meter to cool down for twice the measuring time used before application of low current measurement.

[3] Current can be measured up to 10 A continuously with the maximum operating temperature of 50 °C. An additional 0.3% needs to be added to the specified accuracy if the signal measured is in the range of 10 A to 19.999 A for 15 seconds maximum. After measuring a current of > 10 A, leave the meter to cool down for 60 seconds before applying low current measurement.

[4] The maximum open voltage is < 2.8 V. For instant continuity, the built-in buzzer sounds when resistance is < 10.0 Ω.

[5] The accuracy of 1 kΩ and 10 kΩ is specified after Null function, which is used to substrate the test lead resistance and the thermal effect.

[6] For the range of 100 MΩ, the R.H. is specified for < 60%. The temperature coefficient will be 0.15 times of specified accuracy as > 50 MΩ.

[7] Overload protection: 1000 V RMS for circuits < 0.3 A short circuit current. The built-in buzzer sounds when reading is approximately below 50 mV and audible single tone for normal forward biased diode or semiconductor junction as 0.3 V ≤ Reading ≤ 0.8 V.

[8] Input impedance: 10 MΩ (nominal) in parallel with <100 pF, with overload protection of 1000 V RMS

[9] Crest factor ≤ 3. For non-sinusoidal waveforms with crest factor up to 3, add 2% reading + 2% full scale typical.

[10] Current can be measured from 50 mA to 440 mA continuously. An additional 0.2% needs to be added to the specified accuracy if the signal measured is in the range of 440 mA to 1100 mA for 30 seconds maximum. After measuring current of > 440 mA, leave the meter to cool down for twice the measuring time used before application of low current measurement.

[11] Current can be measured from 0.5 A up to 10 A continuously with the maximum operating temperature of 50 °C. An additional 0.3% needs to be added to the specified accuracy if the signal measured is in the range of 10 A to 19.999 A for 15 seconds maximum. After measuring a current of >10 A, leave the meter to cool down for 60 seconds before applying low current measurement.

## TEMPERATURE SPECIFICATIONS

THERMOCOUPLE TYPE	RANGE	RESOLUTION	ACCURACY ± (% of reading + offset error)
K (for U1241A and U1242A)	-40 to 1000 °C/ -48 to 1832 °F	0.1 °C/ 0.1 °F	1% + 1 °C/ 1% + 1.8 °F
J (for U1242A only)	-40 to 1000 °C/ -48 to 1832 °F	0.1 °C/ 0.1 °F	1% + 1 °C/ 1% + 1.8 °F

## CAPACITANCE SPECIFICATIONS

RANGE	RESOLUTION	ACCURACY ± (% of reading + No. of Least Significant Digit)
1000.0 nF	0.1 nF	1.2% + 4
10.000 µF	0.001 µF	
100.00 µF	0.01 µF	
1000.0 µF	0.1 µF	2% + 4
10.000 mF	0.001 mF	

## HARMONIC RATIO SPECIFICATIONS

RANGE	FREQUENCY	VOLTAGE
0.0% to 99.9%	40 Hz to 500 Hz	100 mVAC to 1000 VAC

## FREQUENCY SPECIFICATIONS

RANGE	RESOLUTION	ACCURACY	MINIMUM INPUT FREQUENCY
100.00 Hz	0.01 Hz	0.03%+3	1 Hz
1000.0 Hz	0.1 Hz		
10.000 kHz	0.001 kHz		
100.00 kHz	0.01 kHz		
1000.00 kHz	0.1 kHz		

## FREQUENCY SENSITIVITY DURING VOLTAGE MEASUREMENT

INPUT RANGE (Maximum input for specified accuracy = 10 x Range or 1000 V)	MINIMUM SENSITIVITY (RMS Sine-Wave)	
	20 Hz - 50 kHz	50 kHz to 200 kHz
1000.0 mV	0.3 V	0.6 V
10.000 V	0.5 V	1.8 V
100.00 V	5 V	10 V (<100 kHz)
1000.0 V	50 V	100 V (<100 kHz)

## OPERATING MEASURING RATE

Function	Times/second
ACV	7
DCV (V or mV)	7
Ω	14
Diode	14
Capacitance	4 (< 100 µF)
DCA (µA, mA, A)	7
ACA (µA, mA, A)	7
Temperature	7 (single)
Frequency	1 (> 10 Hz)

## FREQUENCY SENSITIVITY DURING CURRENT MEASUREMENT

INPUT RANGE	MINIMUM SENSITIVITY (RMS Sine wave) 20 Hz to 20 kHz
1000.0 µA	100 µA
10000 µA	500 µA
100.00 mA	10 mA
440.00 mA	50 mA
10.000 A	1 A

## GENERAL SPECIFICATIONS

<b>Power Supply</b>	4 single standard 1.5 V AAA batteries (Alkaline or Zinc Chloride type)
<b>DISPLAY</b>	Dual display (secondary display is cater for temperature function display only) are 4-digit liquid crystal display (LCD) with maximum reading of 11,000 counts. Automatic polarity indication.
<b>POWER CONSUMPTION</b>	0.22 VA maximum
<b>OPERATING ENVIRONMENT</b>	Full accuracy at -10 °C to 55 °C Full accuracy to 80% RH for temperature up to 30 °C, decreasing linearly to 50% RH at 55 °C
<b>STORAGE COMPLIANCE</b>	-20 °C to 70 °C
<b>ALTITUDE</b>	0 – 2000 meters per IEC 61010-1 2 <sup>nd</sup> Edition CAT III, 1000 V
<b>SAFETY COMPLIANCE</b>	<ul style="list-style-type: none"> <li>• IEC 61010-1:2001 / EN61010-1:2001</li> <li>• USA: UL 61010-1:2004</li> <li>• Canada: CSA C22.2 No. 61010-1:2004</li> </ul>
<b>MEASUREMENT CATEGORY</b>	CAT III 1000 V Overvoltage Protection, Pollution Degree 2
<b>EMC COMPLIANCE</b>	<ul style="list-style-type: none"> <li>• Certified to IEC 61326:2002/EN 61326: 2003</li> <li>• CISPR 11:1990/EN55011:1990</li> <li>• Canada: ICES-001:2004</li> <li>• Australia/New Zealand: AS/NZS CISPR11:2004</li> </ul>
<b>COMMON MODE REJECTION RATIO (CMRR)</b>	> 90 dB at DC, 50/60 Hz ±0.1% (1kΩ unbalanced)
<b>NORMAL MODE REJECTION RATIO (NMRR)</b>	> 60 dB at 50/60 Hz ±0.1%
<b>CREST FACTOR</b>	< 3.0
<b>TEMPERATURE COEFFICIENT</b>	0.1 × (specified accuracy) / °C (from -10 °C to 18 °C or 28 °C to 55 °C)
<b>SHOCK and VIBRATION</b>	Tested to IEC/EN 60068-2
<b>DIMENSION (HxWxD)</b>	193.8 mm x 92.2 mm x 58.0 mm
<b>WEIGHT</b>	450 g with batteries 400 g without batteries
<b>WARRANTY</b>	3 years


## Accessories included:

- Four 1.5 V AAA alkaline batteries
- Certificate of Calibration (CoC)
- Test leads
- Quick Start Guide
- Product Reference CD

## Optional Accessories (sold separately):

- U1162A Alligator clips
- U1163A SMT grabbers
- U1164A Fine tip test probe
- U1181A Immersion probe (measures food, oil, and other liquids temperature within the range of -50 °C to 700 °C)
- U1182A Industrial surface probe (measures still surface temperature within the range of -50 °C and 400 °C)
- U1183A Air probe (measures dryer, transport pipe and surrounding air temperature within the range of -50 °C to 800 °C)
- U1184A Temperature probe adapter
- U1185A Thermocouple (J-type) probe and adapter
- U1186A Thermocouple (K-type) probe and adapter
- U1583A AC current clamp (extend current measurement range up to 400 A)

## DIMENSION

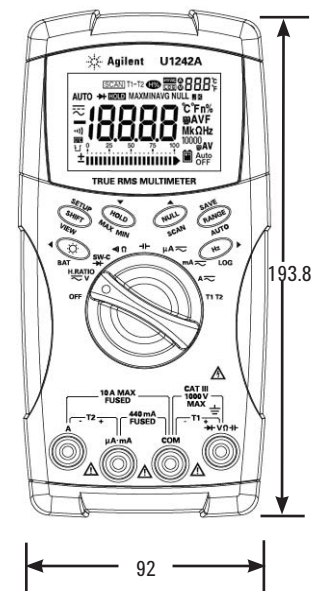



### Agilent Email Updates

[www.agilent.com/find/emailupdates](http://www.agilent.com/find/emailupdates)

Get the latest information on the products and applications you select.



### Agilent Direct

[www.agilent.com/find/agilentdirect](http://www.agilent.com/find/agilentdirect)

Quickly choose and use your test equipment solutions with confidence.



[www.agilent.com/find/open](http://www.agilent.com/find/open)

Agilent Open simplifies the process of connecting and programming test systems to help engineers design, validate and manufacture electronic products. Agilent offers open connectivity for a broad range of system-ready instruments, open industry software, PC-standard I/O and global support, which are combined to more easily integrate test system development.

## Remove all doubt

Our repair and calibration services will get your equipment back to you, performing like new, when promised. You will get full value out of your Agilent equipment throughout its lifetime. Your equipment will be serviced by Agilent-trained technicians using the latest factory calibration procedures, automated repair diagnostics and genuine parts. You will always have the utmost confidence in your measurements.

Agilent offers a wide range of additional expert test and measurement services for your equipment, including initial start-up assistance onsite education and training, as well as design, system integration, and project management.

For more information on repair and calibration services, go to

[www.agilent.com/find/removealldoubt](http://www.agilent.com/find/removealldoubt)

## www.agilent.com

For more information on Agilent Technologies' products, applications or services, please contact your local Agilent office. The complete list is available at:

[www.agilent.com/find/contactus](http://www.agilent.com/find/contactus)

### Phone or Fax

#### United States:

(tel) 800 829 4444  
(fax) 800 829 4433

#### Canada:

(tel) 877 894 4414  
(fax) 800 746 4866

#### China:

(tel) 800 810 0189  
(fax) 800 820 2116

#### Europe:

(tel) 31 20 547 2111

#### Japan:

(tel) (81) 426 56 7832  
(fax) (81) 426 56 7840

#### Korea:

(tel) (080) 769 0800  
(fax) (080) 769 0900

#### Latin America:

(tel) (305) 269 7500

#### Taiwan:

(tel) 0800 047 866  
(fax) 0800 286 331

#### Other Asia Pacific Countries:

(tel) (65) 6375 8100  
(fax) (65) 6755 0042  
Email: [tm\\_ap@agilent.com](mailto:tm_ap@agilent.com)  
Revised: 11/08/06

Product specifications and descriptions in this document subject to change without notice.

© Agilent Technologies, Inc. 2007  
Printed in USA, September 7, 2007  
5989-7040EN



Agilent Technologies